

## WS7808Z

<http://www.sh-willsemi.com>

### 0.1GHz – 3GHz SP8T Antenna Switch

#### Descriptions


The WS7808Z is a Single Pole, Eight-Throw (SP8T) switch, consisting of an SP8T switch that has 8 identical paths, and a GPIO controller. The device is optimized for GSM/EDGE, WCDMA, TD-SCDMA and LTE systems and can be used up to 3GHz applications. The low current consumption makes this device very suitable for battery operated applications. The WS7808Z is manufactured in a compact 2.0mm x 2.0 mm, 14-pin QFN package.

#### Features

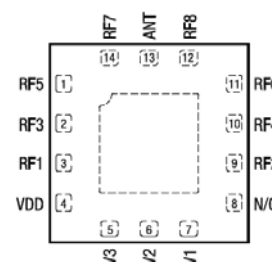
- Small, low profile package 2.0mm x 2.0mm x 0.55mm
- Working frequency up to 3GHz
- Very low insertion loss
- Excellent isolation performance
- Low power consumption
- Exceptional linearity performance for 3G/4G application
- Low harmonic generation
- Wide operation voltage (2.4V to 4.2V)
- Very good ESD performance

#### Applications


- Cell phones
- Tablets
- Other RF front-end modules



**QFN2X2-14L (Bottom view)**



**Pin configuration (Top view)**



ZA = Device code

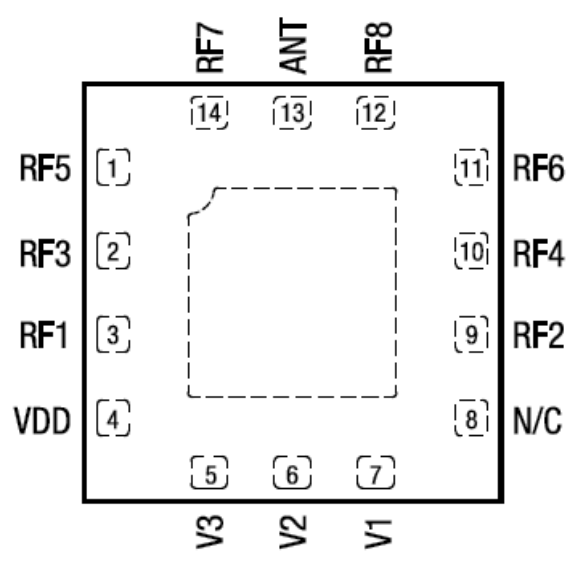
\* = Month code (A~Z)

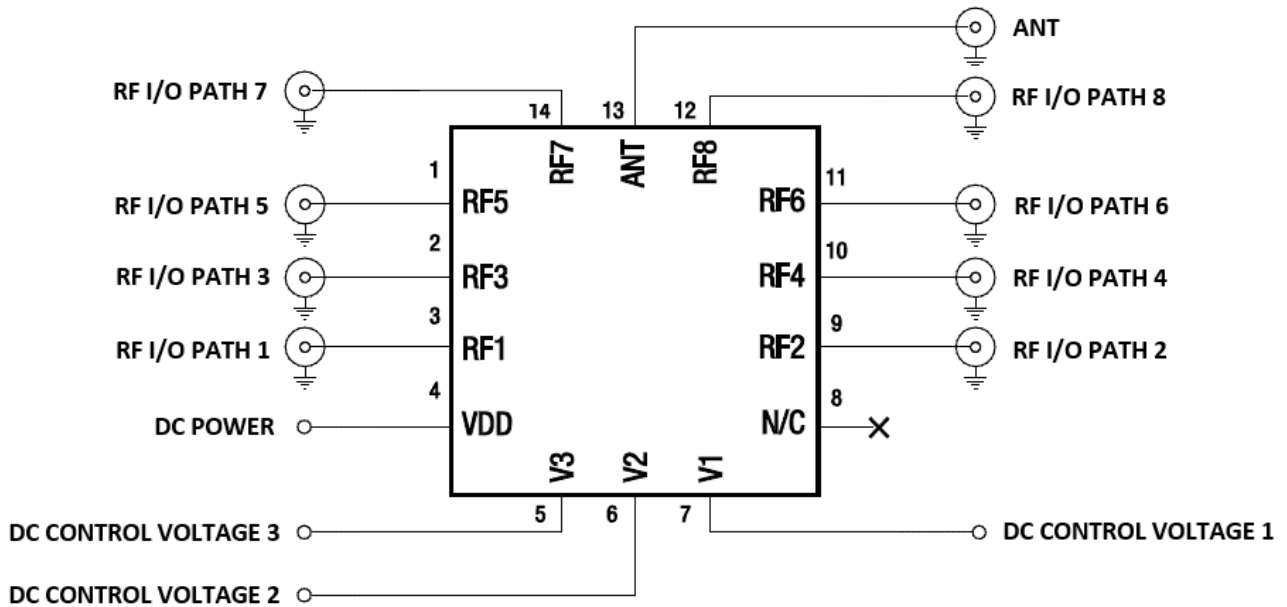
**Marking(Top view)**

#### Order information

Device	Package	Shipping
WS7808Z-14/TR	QFN2X2-14L	3000/Reel&Tape

**Pinning information**

Pin	Function	Description	Transparent top view
1	RF5	RF I/O path 5	
2	RF3	RF I/O path 3	
3	RF1	RF I/O path 1	
4	VDD	DC power supply	
5	VC3	DC control voltage3	
6	VC2	DC control voltage2	
7	VC1	DC control voltage1	
8	NC	Not connected	
9	RF2	RF I/O path 2	
10	RF4	RF I/O path 4	
11	RF6	RF I/O path 6	
12	RF8	RF I/O path 8	
13	ANT	Antenna port	
14	RF7	RF I/O path 7	

**Application information**


**Recommended operating conditions**

Parameters	Conditions	Specifications			Unit
		Min.	Typ.	Max.	
<b>ESD Rating</b>					
ESD RF Pins	HBM, JESD22-A114			1000	V
	CDM, JESD22-C101C			500	V
ESD All Other Pins	HBM, JESD22-A114			1000	V
<b>Power Supply</b>					
Power Supply Voltage	Operating Voltage	2.4	2.8	4.2	V
Power Supply Current (Standby)	$V_{DD} \leq 4.2V$		10		$\mu A$
<b>Control Voltage</b>					
Logic Control "Low"		0	0	0.5	V
Logic Control "High"		1.2	2	3	V
<b>RF Impedance</b>					
RF Port Input and Output Impedance			50		$\Omega$

**Maximum Rating**

Items	Value	Unit
VDD Voltage	-0.3 to +4.8	V
Control Voltage	-0.3 to +3.0	V
Maximum Input Power @ RF ports	40	dBm
Output Load VSWR	20:1	
Operation Temperature	-30 to +85	Deg. C
Storage Temperature	-60 to +150	Deg. C

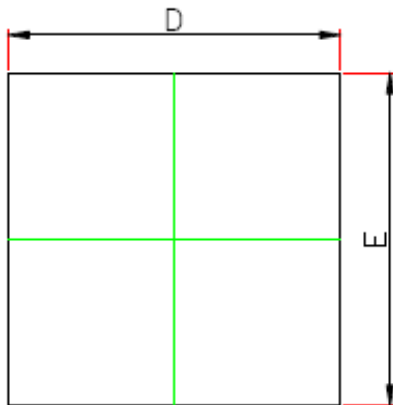
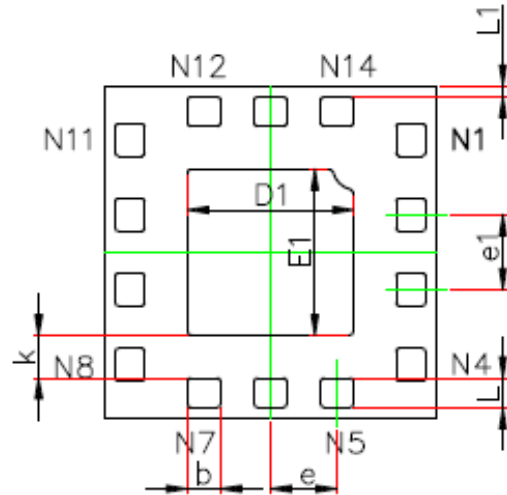
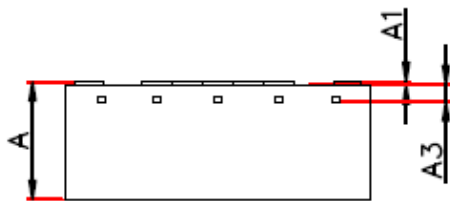
**Characteristics (RF spec)**

Nominal test condition unless otherwise stated. All unused ports are 50Ω terminated. V<sub>DD</sub> = 2.8V, Temp = +25°C

Parameters	Conditions	Specifications			Unit
		Min.	Typ.	Max.	
Insertion Loss (RF1/RF2/RF3/RF4/RF5/RF6)	0.1GHz to 1GHz 1.0GHz to 2.0GHz 2.0GHz to 2.7GHz		0.40 0.55 0.75	0.45 0.60 0.90	dB
Insertion Loss(RF7/RF8)	0.1GHz to 1GHz 1.0GHz to 2.0GHz 2.0GHz to 2.7GHz		0.40 0.65 0.90	0.45 0.70 1.00	dB
Isolation (ANT to RF1/RF2/RF3/RF4/RF5/RF6)	0.1GHz to 1GHz 1.0GHz to 2.0GHz 2.0GHz to 2.7GHz	36 27 24			dB
Isolation (ANT to RF7/RF8)	0.1GHz to 1GHz 1.0GHz to 2.0GHz 2.0GHz to 2.7GHz	30 22 19			dB
Second harmonics (RF1/RF2/RF3/RF4/RF5/RF6/RF7/RF8)	PIN=+26dBm 0.1GHz to 2.7GHz		77	80	dBc
Third harmonics (RF1/RF2/RF3/RF4/RF5/RF6/RF7/RF8)	PIN=+26dBm 0.1GHz to 2.7GHz		80	85	dBc
0.1dB Compression Point (RF7/RF8)	0.1GHz to 2.7GHz		38		dBm
0.1dB Compression Point (RF1/RF2/RF3/RF4/RF5/RF6)	0.1GHz to 2.7GHz		36		dBm
3 <sup>rd</sup> Order Input Intercept Point	@2GHz, PIN=+26dBm, Δf=1MHz		69		dBm

**Truth Table for Operation**

SP8T Mode	Vc1	Vc2	Vc3
RF1	0	0	0
RF2	0	0	1
RF3	0	1	0
RF4	0	1	1
RF5	1	0	0
RF6	1	0	1
RF7	1	1	0
RF8	1	1	1

**Package outline dimensions**
**QFN 2X2-14L**

**TOP VIEW**

**BOTTOM VIEW**

**SIDE VIEW**

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	0.500	0.600	0.020	0.024
A1	-0.004	0.046	0.000	0.002
A3	0.110REF.		0.004REF.	
D	1.950	2.050	0.077	0.081
E	1.950	2.050	0.077	0.081
D1	0.900	1.100	0.035	0.043
E1	0.900	1.100	0.035	0.043
k	0.200MIN.		0.008MIN.	
b	0.150	0.250	0.006	0.010
e	0.400TYP.		0.016TYP.	
e1	0.450TYP.		0.018TYP.	
L	0.130	0.230	0.005	0.009
L1	0.015	0.115	0.001	0.005

